

CVTL Double-Wide Series

Features:

- Powered by the patented Thinline rack and pinion rotary actuator for smooth operation
- Compatible with both standard domestic style 2-bar and European style roll-out carts as well as 4-wheel comb lift containers
- Dumps carts higher and deeper inside the hopper opening to prevent spillage and increase route stops before cycling packer blade
- Self-lubricating composite bearings at main pivot points
- Powder-coated finish for durability



Specifications:

Cart Compatibility: ANSI Z245.60-1996 Type B Carts (Domestic Style 2-Bar)
 ANSI Z245.60-1996 Type C Carts (European Style)
 660, 770, 1100 Liter 4-Wheel Comb Lift Containers

Lift Capacity: 800 lbs @ 2300 psi

Hydraulic Pressures: Working Pressure: 2300 psi
 Maximum Pressure: 2500 psi

Hydraulic Flow: 2.0 - 2.5 gpm


Cycle Time: 10 - 12 seconds

Bearings: Self-lubricating Composite Material

Actuator: Patented Thinline Rack and Pinion Rotary Actuator

Finish: Safety Yellow Powder Coating

DIMENSIONS ACCOMMODATE THE FOLLOWING UNITS	
PART NO.	DESCRIPTION
1905-0068	CVTL 2212 + 15' DW (SEQUENCE VALVE)
1905-0069	CVTL 2212 + 15' DW (DUAL HAND VALVE)
1905-0118	CVTL 2212 + 15' DW (NO CONTROLS)

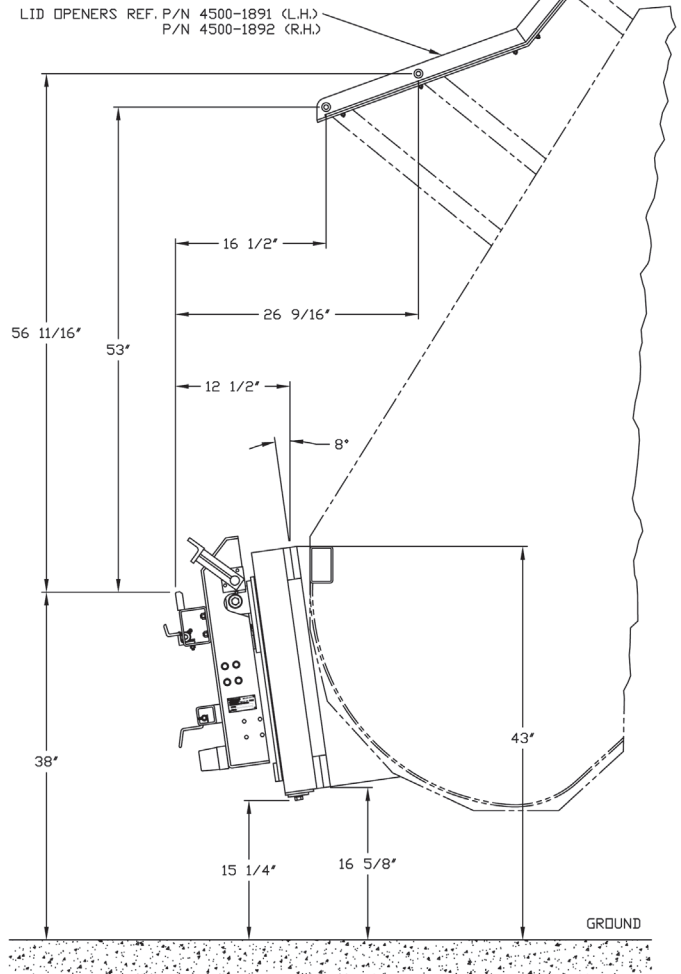

NOTE:
 1. DIMENSIONS ACCOMMODATE ANSI Z245.60-1996 TYPE B (DOMESTIC) CONTAINERS AND MOST TYPE C (EUROPEAN) CONTAINERS, BUT MAY VARY DUE TO CONTAINER SPECIFICATIONS OR APPLICATIONS.
 2. DIMENSIONS REFER TO EMPTY TRUCK WITH FULLY CHARGED SUSPENSION.

Provides an excellent solution for residential and commercial collection with a single truck!

Call Our Knowledgeable Sales Staff Today!

We Offer Fast...Same Day

Shipping On Most Of Our In Stock Replacement Refuse Parts

Holtz Industries, Inc. • 200 South Terrace Court • Newark, OH 43055
Call Us Toll Free: 1-800-535-0104 • Local: 740-366-4002 • Fax: 740-366-0771