

MODEL D6237: UNIVERSAL LOW MOUNT TUCKAWAY® LIFTER

The Universal low mount Tuckaway® features swooping movement that allows for low sill height mounting. When mounted to rearloaders, it can clear tipper bars, dump deeply into the hopper, and store under the hopper sill when not in use. Powered by our new 27k helical rotary actuator!



Features and Benefits

The performance you demand requires a serious machine with all the refinements that you've come to expect from the leader in the waste handling industry.

- ◆ All new, powerful 27k Helical Actuator
- ◆ Featuring TuckAway® Lifter Performance
- ◆ Unique "Back-Saving" action grabs carts on various terrains and heights
- ◆ Minimal greasing for less maintenance
- ◆ Spring loaded lower latch is easy on cart surfaces
- ◆ UHMW upper saddle prevents scratches on carts
- ◆ ISO 9001 manufacturer
- ◆ National Service technicians for product support
- ◆ Fully staffed engineering department for custom applications



Specifications


- Fully compatible to ANSI Type B carts
- Mounting height to top of plate:
Low as 30", up to 40"
- 1,550 PSI required for 400lb load
- 6-8 second cycle time @ 3 GPM
- 45 degree dump angle
- Plastic slide requires no grease
- Safety Yellow powder-coated finish
- Self-Lubricated bearings at pivot points
- Easy bolt-on/off mounting plate included
- Adjustable flow control valve
- New 3 year limited warranty



Inside a Perkins actuator, the loads are carried by all the teeth, all the time



Inside rack & pinion systems, the loads are concentrated on only one tooth

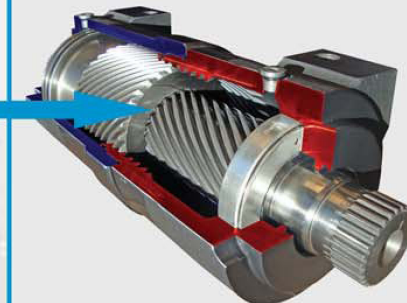

NEW ADVANCED 27K ACTUATOR

- ◆ Higher torque & lower weight
- ◆ Two-part casted body is easier to open and service
- ◆ Fewer parts & fewer points that need sealing
- ◆ New grease points positioned to help flush away contaminants

Holtz Industries, Inc.

200 South Terrace Court
Newark, OH 43055

Toll Free: 1-800-535-0104

Web: www.holtzindustries.com



Perkins. Route tested. Driver approved.

Model D6237 Cart Lifter An ISO 9001:2000 Company